




PH. 800-321-8073

FX. 334-855-3507

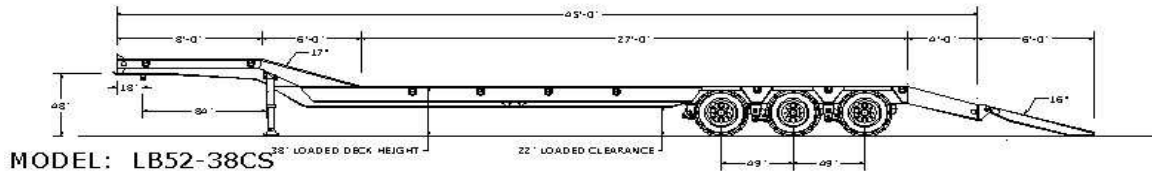

Model LB52-38CS

www.pittstrailers.com

STANDARD FEATURES

Load Capacity _____	104,000 lbs. In 16'
Weight _____	18,500 lbs.
Overall Length _____	45'
Width _____	8'6"
Deck Length _____	31' (27' Level Deck + 4' Dovetail)
Deck Height _____	38" Loaded
Gooseneck _____	Flat Deck-Wood with 17 Degree Slope- Steel with Traction Bars
Fifth Wheel Height _____	48"
King Pin Swing Radius _____	84"
King Pin Setting _____	18"
Mainframe _____	16" Wide Flange-Mill Roll "I" Beam
Side Rails _____	12" Wide Flange-Mill Roll "I" Beam
Cross Members _____	8" Wide Flange-Mill Roll "I" Beam
Wheel Wells _____	Covered with Check Plate & Traction Bars
Dovetail _____	48" Covered with Check Plate & Traction Bars
Loading Ramps _____	Spring Assist, 24" x 72"
Landing Gear _____	Two Speed, 50,000 lbs. Capacity
Lashing Rings _____	9 Per Side (18 total)
Decking _____	Full 1-3/4" Oak
Suspension _____	Hutch 3 Point, Four Spring, w/ 14,000 lbs cap. Spring
Axles _____	25,000 lbs. Capacity, 77.5" Track, Auto Slack Adjusters, Type 30 Brake Chambers, Outboard Drums
Brakes _____	16 1/2" x 7"
Tires _____	255/70R22.5 Low Profile Radials
Wheels _____	8.25x22.5 Steel Disc/ Hub Piloted
Wiring _____	D.O.T. Sealed Wiring Harness, Sealed Lights Rubber Mounted
Tool Box _____	Covered In Gooseneck
Mud Flaps _____	Spray Guard and Anti-Sail
Flag Holders _____	On All Four Corners
Paint _____	Black (Two Part Primer w/ Two Part Polyurethane Paint)

NOTE ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WEIGHTS AND DIMENSIONS ARE APPROXIMATE

OPTIONAL EQUIPMENT

GOOSENECK

- Revolver Greaseless Coupling System (Eliminates Need To Grease 5th Wheel) _____
- 90° Gooseneck With Flat Upper Deck - Wood Filled _____
- No Motor Grader Ramps _____

MAINFRAME – Fabricated – "I" Beam with Positive Camber

DECK

- Additional Length In Deck Area _____
- Additional Width - 9' includes 83.5 Track Axle (\$75 Per State Delivery Charges) _____
- 10' includes 95.5 Track Axle (\$75 Per State Delivery Charges) _____
- Widening Brackets _____
- Apitong 1-3/4" (In lieu of oak) _____
- Floor Clips (In Lieu of Screws) _____

BOGIE

- Type 30/30 Spring Brakes (Per Axle)
- Aluminum Wheels (Outside Polished)
- Air Ride 75,000 lb. Cap.
- Dovetail Covered with Wood in Lieu of Check Plate
- 60" Dovetail Covered with Check Plate & Traction Bars
- Rear Hydraulic Ramps (36" x 96")
 - Double Folding (36" x 144")
- 275/70R22.5 Tires