




PH. 800-321-8073

FX. 334-855-3507

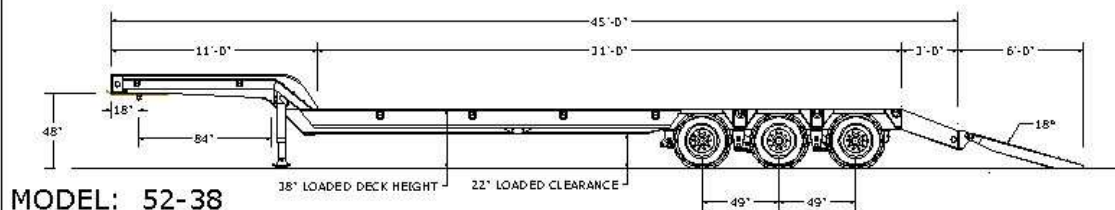

MODEL: 52-38

Model LB52-38

www.pittstrailers.com

STANDARD FEATURES

| | |
|-----------------------|--|
| Load Capacity | 104,000lbs. In 16' |
| Weight | 18,400lbs. |
| Overall Length | 45' |
| Width | 8'6" |
| Deck Length | 34' (31' Level Deck + 3' Dovetail) |
| Deck Height | 38" Loaded |
| Gooseneck | Exposed Neck w/ Steel Motor Grader Ramps |
| Fifth Wheel Height | 48" |
| King Pin Swing Radius | 84" |
| King Pin Setting | 18" |
| Mainframe | 16" Wide Flange – Mill Roll "I" Beam |
| Siderails | 12" Wide Flange -Mill Roll "I" Beam |
| Cross Members | 8" Wide Flange-Mill Roll "I" Beam |
| Wheel Wells | Covered with Check Plate & Traction Bars |
| Dovetail | 36" Covered with Check Plate & Traction Bars |
| Loading Ramps | Spring Assist, 24"x 72" |
| Landing Gear | Two Speed, 50,000lbs. Capacity |
| Lashing Rings | 9 Per Side (18 total) |
| Decking | Full 1-3/4" Oak |
| Suspension | Hutch Three Point, Four Spring, with 14,000 lbs. Cap. Springs |
| Axles | 25,000lbs. Capacity, 77.5" Track, Auto Slack Adjusters, Type 30 Brake Chambers, outboard drums |
| Brakes | 16 1/2" x 7" |
| Tires | 255/70R22.5 Low Profile Radials |
| Wheels | 8.25x22.5 Steel Disc/ Hub Piloted |
| Wiring | D.O.T. Sealed Wiring Harness, Sealed Lights Rubber Mounted |
| Tool Box | Covered In Gooseneck |
| Mud Flaps | Spray Guard and Anti-Sail |
| Flag Holders | On All Four Corners |
| Paint | Black (Two Part Primer w/ Two Part Polyurethane Paint) |

NOTE ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WEIGHTS AND DIMENSIONS ARE APPROXIMATE

OPTIONAL EQUIPMENT

GOOSENECK

- Revolver Greaseless Coupling System (Eliminates Need To Grease 5th Wheel) _____
- No Motor Grader Ramps _____
- 90° Gooseneck With Flat Upper Deck - Wood Filled _____

MAINFRAME – Fabricated "I" Beam with Positive Camber

DECK

- Additional Length In Deck Area _____
- Additional Width 9' includes 83.5" Track Axles _____
- 10' includes 95.5" Track Axles _____
- Widening Brackets _____
- Apitong 1- 3/4" (In Lieu of Oak) _____
- Floor Clips (In Lieu of Screws) _____

BOGIE

- Type 30/30 Spring Brakes (Per Axle)
- Aluminum Wheels (Outside Polished)
- Air Ride 75,000 lb. Cap.
- Dovetail Covered with Wood in Lieu of Check Plate
- 48" Dovetail Covered with Check Plate & Traction Bars
- 60" Dovetail Covered with Check Plate & Traction Bars
- Rear Hydraulic Ramps (36" x 96")
 - Double Folding (36" x 144")
- 275/70R22.5 Tires