




“You’re Ahead with a Pitts Behind”™

LT40-8L

9,300 lbs +/- 3%

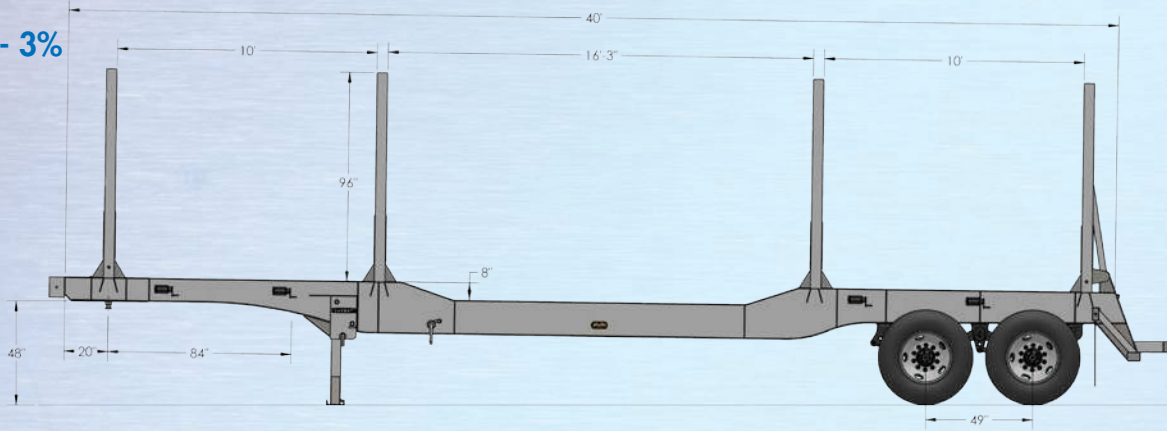

AXLES

- ▶ 25,000 lb capacity, 77 1/2" track
- ▶ Anti Lock brake system
- ▶ 16 1/2" x 7" air brakes
- ▶ Type 30/30 brake chambers

SUSPENSION

- ▶ Hutch 9700 3-point heavy duty 4-leaf steel spring - top slung

WHEELS

- ▶ 10 hole unimount

TIRES

- ▶ 11R24.5 radials

BOLSTERS

- ▶ 4" x 10" tubing, 70K yield (LT40-8L)
- ▶ 3 1/2" x 9 1/2" tubing, 100K yield (LT40-8UL)

STANDARDS

- ▶ 5" x 5" tubing, 70K yield (LT40-8L)
- ▶ 4 1/2" x 4 1/2" tubing, 100K yield (LT40-8UL)

LANDING GEAR

- ▶ 4 1/2" x 4 1/2" tubing, 100K yield

BUMPER

- ▶ 4" x 6" tubing, 70K yield

AIR TANK

- ▶ Covered

MAINFRAMES

- ▶ 24" fabricated beam, T-1 steel

WINCHES

- ▶ With 30' nylon straps

TOOL BOX

- ▶ (1) Standard

PAINT

- ▶ High quality 2-part PPG acrylic urethane
- ▶ High quality 2-part PPG primer
- ▶ White blasted and cleaned prior to painting
- ▶ Electrostatic primer and paint application
- ▶ Pitts Black is standard

Popular options: Revolver greaseless coupling system * Aluminum wheels * Grapple bar * Electronic or air scales
 * Single point spring suspension * PITTS-air lift axle on a single point suspension * Air ride suspension * Headboard
 * Slideable bolsters * Custom designs

LT40-8UL

8,650 lbs +/- 3%

