


# TA25 · Tag Along



Sourcewell   
 Awarded Contract  
 Contract # 092922- PTT

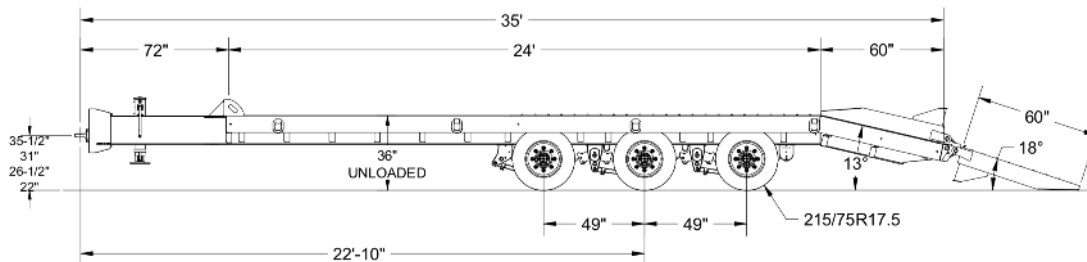

Since 1976, Pitts has built trailers for the construction, commercial and forestry markets tough enough for every job and priced to make you profitable.

The workhorses of the heavy haul division, include a Hydraulic Detachable, Hydraulic Tail, Fixed Neck and Tag-Along with every feature you desire.

# TA25 Standard Features



|   |
|---|
| <b>CAPACITY</b>                                 |
| 50,000 lb. capacity at 55 MPH                   |
| <b>LOAD BASE</b>                                |
| 16' concentrated load                           |
| <b>ESTIMATED TARE WEIGH</b>                     |
| 10,850 lbs.                                     |
| <b>DIMENSIONS</b>                               |
| Overall: 102" width x 35' length                |
| Platform: 36" height x 29' length               |
| Dovetail: 60" length                            |
| Ramp: 23 ½" width x 60" length                  |
| <b>LOAD BASE</b>                                |
| 1 ½" Premium Apitong                            |
| Wheel wells covered in steel with traction bars |
| Dovetail self cleaning ladder                   |
| Ramps self cleaning ladder                      |
| <b>MAIN RAILS</b>                               |
| W14" x 26# A572 Gr. 50 - High Tensile           |
| <b>CROSSMEMBERS</b>                             |
| 6" Jr. I-Beam A572 Gr. 50 - High Tensile        |
| <b>AXLES</b>                                    |
| (3) Heavy Duty 22,500 lbs 49" axle spacing      |
| <b>BRAKES</b>                                   |
| 12 ¼" X 7 ½" Air - ABS                          |

|  |
|--|
| <b>SUSPENSION</b>                                |
| Heavy Duty leaf spring                           |
| <b>HUBS</b>                                      |
| Hub-piloted 8-stud mount                         |
| Outboard cast drums                              |
| <b>WHEELS</b>                                    |
| (8) Hole, hub piloted                            |
| (8) 215/75x17.5 16 ply                           |
| <b>ELECTRICAL SYSTEM</b>                         |
| Fully sealed wiring harness with LED lights      |
| Marker lights and mid-turn signals               |
| Oval stop, tail and turn lights per side on rear |
| <b>PROTECTIVE COATING</b>                        |
| High quality 2-part black acrylic urethane       |
| High quality 2-part primer                       |
| White blasted and cleaned prior to painting      |
| <b>LASH RINGS</b>                                |
| (4) Pair (8 total), bent D-ring                  |
| <b>HITCH</b>                                     |
| Adjustable Pintle Eye - 4 Position               |
| <b>LANDING GEAR</b>                              |
| Heavy Duty Drop Leg 2-Speed                      |

*Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment. Axle placement and legal load ratings are dependent upon federal, state, and local regulations, GAWR and tire ratings. Copyright © 2019 Pitts Enterprises, Inc. (published). All rights reserved.*