

Carter



TA20 - Tag Along

PITTS HEAVY HAUL


APPROVED SOURCEWELL SUPPLIER



Sourcewell

Awarded Contract

Contract # 092922-PTT

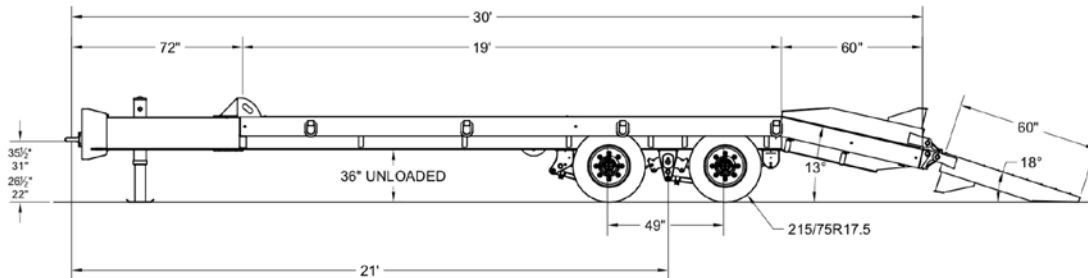

Since 1976, Pitts has built trailers for the construction, commercial and forestry markets tough enough for every job and priced to make you profitable.

The workhorses of the heavy haul division, include a Hydraulic Detachable, Hydraulic Tail, Fixed Neck and Tag-Along with every feature you desire.

PITTS TRAILERS IS A SOURCEWELL APPROVED SUPPLIER



TA20 Standard Features



CAPACITY
40,000 lb. capacity at 55 MPH
ESTIMATED TARE WEIGHT (STANDARD PACKAGE)
7,600 lbs.
DIMENSIONS
Overall: 102" width x 30' length
Platform: 36" height x 24' length
Dovetail: 60" length
Ramp: 23 1/2" width x 60" length
LOAD BASE
16' concentrated load
MAIN RAILS
W14" x 22# A572 Gr. 50 - High Tensile
LOAD BASE
Deck 1 1/2" Premium Apitong
Wheel wells covered in steel with traction bars
Dovetail self cleaning ladder
Ramps self cleaning ladder
AXLES
(2) Heavy Duty 22,500 lbs 49" axle spacing
BRAKES
12 1/4" x 7 1/2" air-ABS

SUSPENSION
Heavy duty leaf spring
HUBS
Hub-piloted 8-stud mount
Outboard cast drums
WHEELS/TIRES
(8) Hole, hub piloted
(8) 215/75x17.5 16 ply
ELECTRICAL SYSTEM
Fully sealed wiring harness with LED lights
Marker lights and mid-turn signals
Oval stop, tail and turn lights per side on rear
PROTECTIVE COATING
High quality 2-part black acrylic urethane
High quality 2-part primer
White blasted and cleaned prior to painting
HITCH
Adjustable Pintle Eye - 4 Position
LANDING GEAR
Heavy Duty Drop Leg 2-Speed
LASH RINGS
(4) Pair (8 total), bent D-ring

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment. Axle placement and legal load ratings are dependent upon federal, state, and local regulations, GAWR and tire ratings. Copyright © 2019 Pitts Enterprises, Inc. (published). All rights reserved.

