

Carter



TA25 • Tag Along

PITTS Trailers®
Since 1976


APPROVED SOURCEWELL SUPPLIER



Sourcewell

Awarded Contract

Contract # 092922- PTT

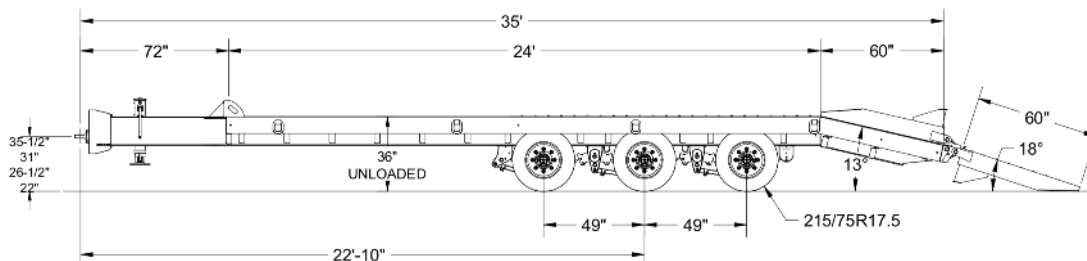

Since 1976, Pitts has built trailers for the construction, commercial and forestry markets tough enough for every job and priced to make you profitable.

The workhorses of the heavy haul division, include a Hydraulic Detachable, Hydraulic Tail, Fixed Neck and Tag-Along with every feature you desire.

PITTS TRAILERS IS A SOURCEWELL APPROVED SUPPLIER



TA25 Standard Features



CAPACITY
50,000 lb. capacity at 55 MPH
LOAD BASE
16' concentrated load
ESTIMATED TARE WEIGH
10,850 lbs.
DIMENSIONS
Overall: 102" width x 35' length
Platform: 36" height x 29' length
Dovetail: 60" length
Ramp: 23 ½" width x 60" length
LOAD BASE
1 ½" Premium Apitong
Wheel wells covered in steel with traction bars
Dovetail self cleaning ladder
Ramps self cleaning ladder
MAIN RAILS
W14" x 26# A572 Gr. 50 - High Tensile
CROSSMEMBERS
6" Jr. I-Beam A572 Gr. 50 - High Tensile
AXLES
(3) Heavy Duty 22,500 lbs 49" axle spacing
BRAKES
12 ¼" X 7 ½" Air - ABS

SUSPENSION
Heavy Duty leaf spring
HUBS
Hub-piloted 8-stud mount
Outboard cast drums
WHEELS
(8) Hole, hub piloted
(8) 215/75x17.5 16 ply
ELECTRICAL SYSTEM
Fully sealed wiring harness with LED lights
Marker lights and mid-turn signals
Oval stop, tail and turn lights per side on rear
PROTECTIVE COATING
High quality 2-part black acrylic urethane
High quality 2-part primer
White blasted and cleaned prior to painting
LASH RINGS
(4) Pair (8 total), bent D-ring
HITCH
Adjustable Pintle Eye - 4 Position
LANDING GEAR
Heavy Duty Drop Leg 2-Speed

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment. Axle placement and legal load ratings are dependent upon federal, state, and local regulations, GAWR and tire ratings. Copyright © 2019 Pitts Enterprises, Inc. (published). All rights reserved.