



HEAVY HAUL

You're Ahead with a Pitts Behind.™

AMERICA'S PREMIER LOWBOY MANUFACTURER

Since 1976, Pitts Trailers has been revolutionizing the trailer industry with our innovative and high-quality designs. Our trailers are not just built to last; they are proven to deliver the lowest cost of ownership in the market. As a leading manufacturer ranked among the top two in the industry, Pitts Trailers consistently sets new standards in innovation and performance that you can trust.



You're Ahead with a Pitts Behind.™




1976

Andrew Pitts found his hometown, Pittsview, Alabama, the perfect place for growing a business. The first log trailer built with the logo "Bulldog Trailers" was only the beginning.



1994

Pitts Trailers pioneered the LOADPAYIN' series, lightweight, durable, and most reliable log trailer at customers' request. "The best way to design a trailer is to talk to the people who use it."
—Andrew Pitts, 1976.



2002

Jeff Pitts, Andrew's son, joined the company in 1982. After 20 years with the company, Jeff Pitts bought the operation from his father.



2014

Pitts Enterprises rewards employees with stock ownership plan, giving the employees a personal investment in the company.

2018

Pitts Enterprises constructs a new 25,000 forestry trailer focused production facility for advanced manufacturing practices using lean manufacturing principles that ensure quality and consistency.




2020

Pitts Enterprises expands again with another 25,000 square foot facility dedicated to the intermodal chassis.



2022

Pitts makes significant investment in Automated laser cutting and robotic welding to improve quality and efficiency.



2023

Pitts Trailers introduces the Contender GT, the industry's newest and highest performing Hydraulic removable gooseneck lowboy.



2024

Pitts began offering Heavy Duty Packages for the forestry line trailers to allow for further customization.



2025

Pitts Trailers expands its flagship line with the Contender GT40.


STANDARD FEATURES



Prep for Flip Axle



Prep for Flip Neck Extensions



Triple Bogie Web



Low Profile Neck 5 Position



New Frame Jack Design

POPULAR PERFORMANCE OPTIONS




Beaver Tail and Ramp



Gooseneck Flip Extensions



Honda Pony Motor Auto Choke



Removable Load Bearing Wheel Covers



Spreader for Flip Axle




CONTENDER GT

GT Detach Trailers (Weights in pounds / Dimensions in inches)

Standard Features	Payload Capacity	Goose Neck Height Adjustment	Goose Neck Length	Swing Clearance (Add 6" w/ Flip Ramps)	Loaded Deck Height	OAL Length	Deck Length	Axle Spacing	3 Lift Axle	4 beam Design with 24" centers	4" Stubbed Crossmembers on 12" Centers	Apitong Decking	Approach Ramps Fixed with Optional Flip	Outriggers, Removable	Plumbed for Goose Neck Extensions	Frame Reinforced For Additional Axles	Open Wheels with Bolsters	Load Bearing Removable Covered Wheels	Tire Size	Heavy Duty 25,000 Axles	Weight (Lbs.)	Full upper deck	Standard Features
LB60-22GT	120,000 Lbs. in any 12'	5	12'-8"	102"	22" w/ 6" GC	52' -10"	26'	54.5"	Standard	Standard	Standard	1-1/2"	Standard	Standard	Standard	Flip Axle/ Booster	Standard	Optional	275/70R22.5	Standard	22,300	Optional	LB60-22GT
LB60-18GT	120,000 Lbs. in any 12'	5	12'-8"	102"	18" w/ 6" GC	52' -10"	26'	54.5"	Standard	Standard	Standard	1-1/2"	Standard	Standard	Standard	Flip Axle/ Booster	Standard	Optional	275/70R22.5	Standard	23,500	Optional	LB60-18GT
LB55-22GT	110,000 Lbs. in any 12'	5	12'-8"	102"	22" w/ 6" GC	52' -10"	26'	54.5"	Standard	Standard	Standard	1-1/2"	Standard	Standard	Standard	Flip Axle/ Booster	Standard	Optional	275/70R22.5	Standard	21,300	Optional	LB55-22GT
LB55-18GT	110,000 Lbs. in any 12'	5	12'-8"	102"	18" w/ 6" GC	52' -10"	26'	54.5"	Standard	Standard	Standard	1-1/2"	Standard	Standard	Standard	Flip Axle/ Booster	Standard	Optional	275/70R22.5	Standard	22,300	Optional	LB55-18GT
LB40-22GT	80,000 Lbs. in any 12'	5	10'-7.5"	84"	22" w/ 6" GC	53'	34'	49"	NA	Standard	Standard	1-1/2"	Standard	Standard	Standard	Flip Axle/ Booster	Standard	Optional	255/70R22.5	Standard	17,400	Optional	LB40-22GT
LB40-18GT	80,000 Lbs. in any 12'	5	10'-7.5"	84"	18" w/ 6" GC	53'	34'	49"	NA	Standard	Standard	1-1/2"	Standard	Standard	Standard	Flip Axle/ Booster	Standard	Optional	255/70R22.5	Standard	18,400	Optional	LB40-18GT


LB60-22GT

Base Weight 22,300 lbs.

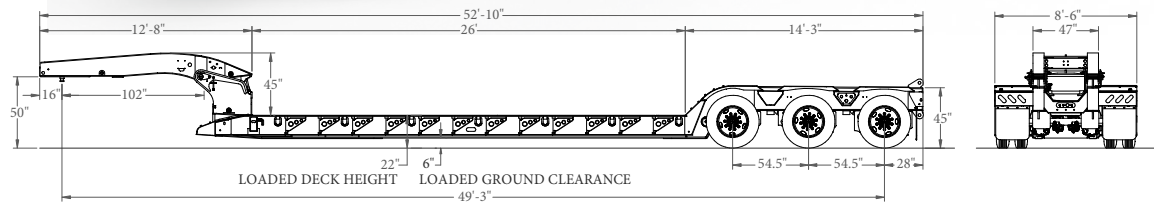


LB55-22GT

Base Weight 21,300 lbs.

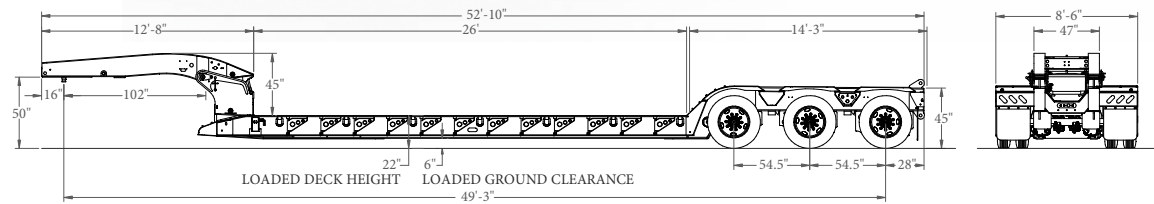


LB40-22GT

Base Weight 17,400 lbs.

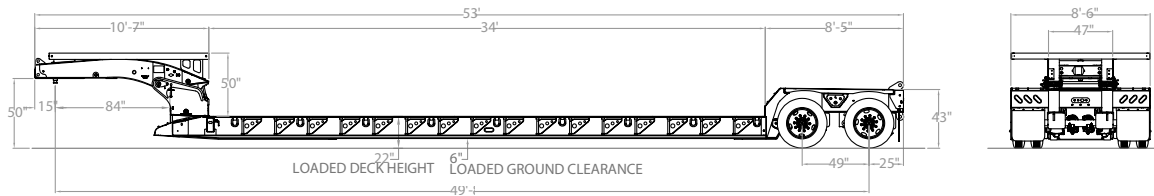


LB60-18GT

Base Weight 23,500 lbs.

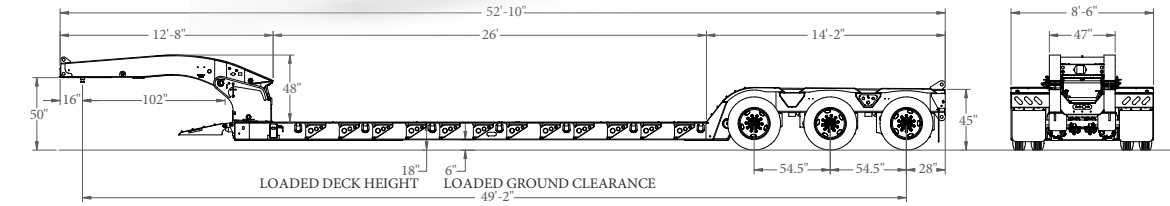


LB55-18GT

Base Weight 22,300 lbs.

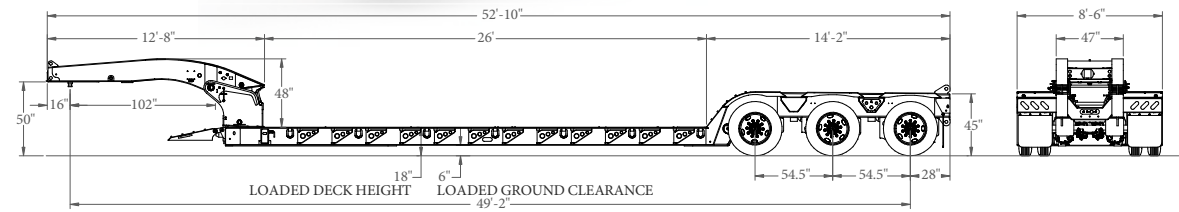


LB40-18GT

Base Weight 18,400 lbs.

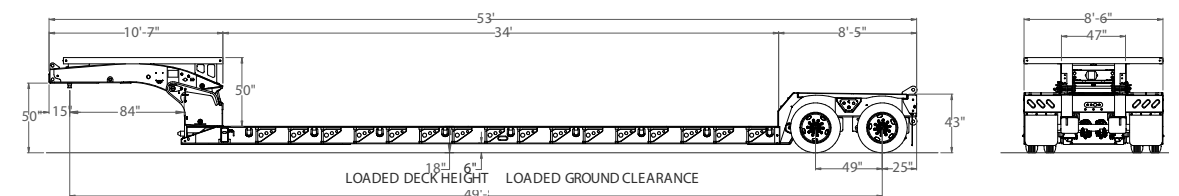

STANDARD FEATURES

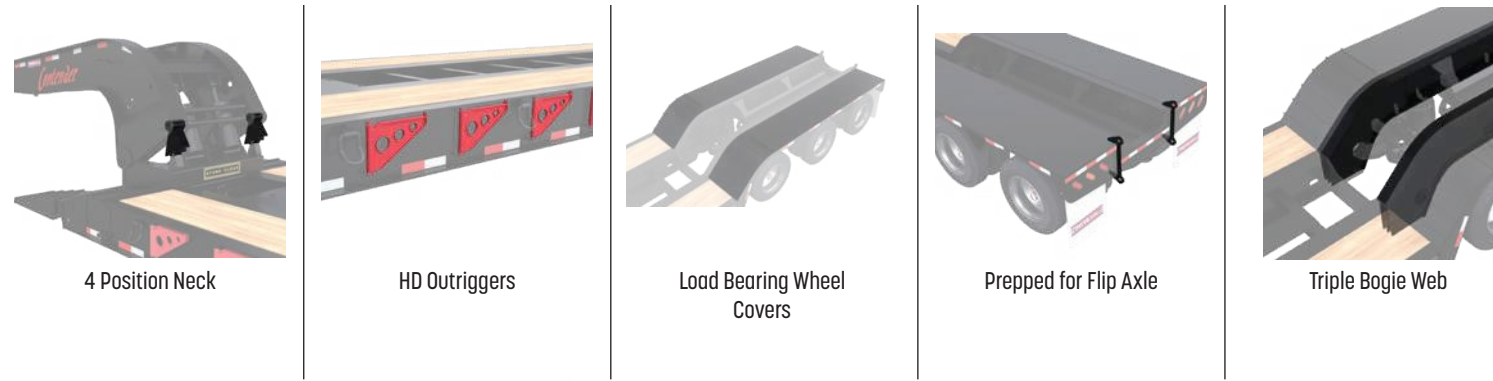

4 Position Neck


HD Outriggers

Load Bearing Wheel Covers

Prepped for Flip Axle

Triple Bogie Web

POPULAR PERFORMANCE OPTIONS

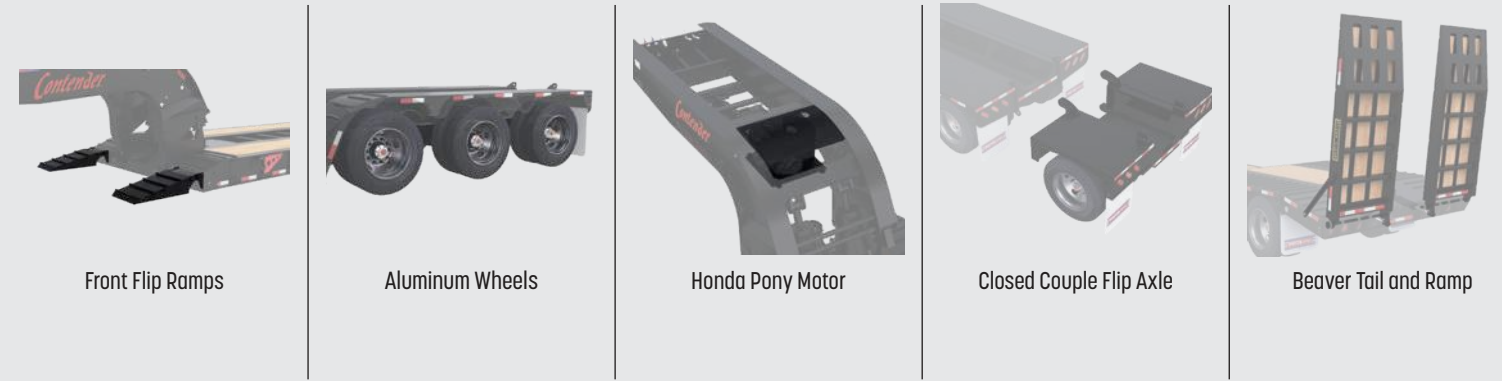

Front Flip Ramps

Aluminum Wheels

Honda Pony Motor

Closed Couple Flip Axle

Beaver Tail and Ramp




Contender DC

DC DETACH TRAILERS (Weights in pounds / Dimensions in inches)

Standard Features	Capacity	Goose Neck Height Adjustment	Goose Neck Length	Swing Clearance (Add 6" w/ Flip Ramps)	Loaded Deck Height	OAL Length	Deck Length	Axle Spacing	3 Lift Axle	4 beam Design with 24" centers	4" Stubbed Crossmembers on 12" Centers	Apitong Decking	Approach Ramps Fixed with Optional Flip	Outriggers, Removable	Frame Reinforced For Additional Axles	Open Wheels with Bolsters	Load Bearing Covered Wheels	Tire Size	Heavy Duty 25,000 Axles	Weight (lbs.)	Standard Features
LB55-22DC	110,000 Lbs. in any 12'	4	13'-4"	102"	22" w/ 6" GC	52'-8"	25'	54.5"	Standard	Standard	Standard	1-1/2"	Standard	Standard	Flip Axle	Optional	Standard	275/70R22.5	Standard	21,700	LB55-22DC
LB51-22DC	102,000 Lbs. in any 12'	4	12'4"	90"	22" w/ 6" GC	52'	25'	54.5"	Standard	Standard	Standard	1-1/2"	Standard	Standard	Flip Axle	Standard	Optional	255/70R22.5	Standard	19,400	LB51-22DC
LB35-22DC	70,000 Lbs. in any 12'	4	11'-11"	84"	22" w/ 6" GC	46'	25'	49"	NA	Standard	Standard	1-1/2"	Standard	Standard	Flip Axle	Standard	Optional	255/70R22.5	Standard	15,300	LB35-22DC
LB55-22DPS	110,000 Lbs. in any 12'	4	11'-7"	90"	22" w/ 6" GC	52'-8"	24'	49"	Standard	Standard	Standard	1-1/2" Full Deck	Wood Filled Paver	Standard	Optional	NA	Standard with Center Wood Filled	275/70R22.5	Standard	24,500	LB55-22DPS
LB51-22DPS	102,000 Lbs. in any 12'	4	11'-7"	90"	22" w/ 6" GC	52'-8"	24'	49"	Standard	Standard	Standard	1-1/2" Full Deck	Wood Filled Paver	Standard	Optional	NA	Standard with Center Wood Filled	255/70R22.5	Standard	23,300	LB51-22DPS
LB35-22DPS	70,000 Lbs. in any 12'	4	11'-7"	84"	22" w/ 6" GC	48'	24'	49"	NA	Standard	Standard	1-1/2" Full Deck	Wood Filled Paver	Standard	Optional	NA	Standard with Center Wood Filled	255/70R22.5	Standard	18,300	LB35-22DPS


LB55-22DC

Base Weight 21,700 lbs.

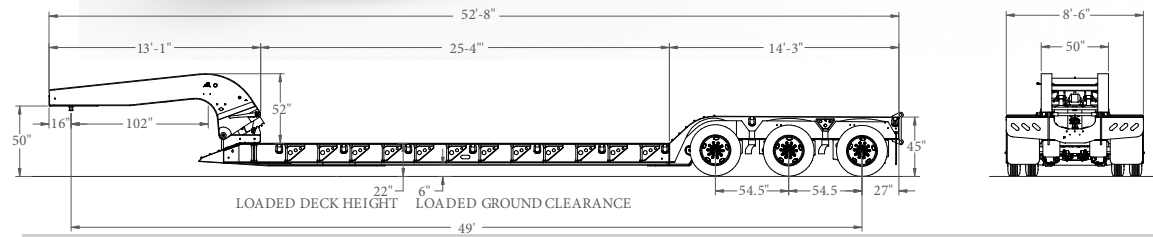


LB51-22DC

Base Weight 19,400 lbs.

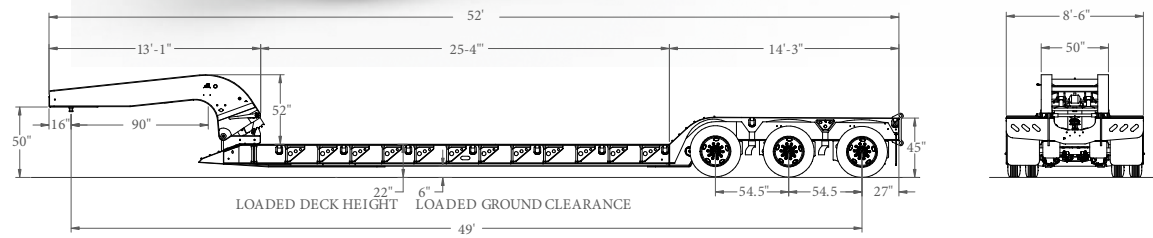


LB35-22DC

Base Weight 15,300 lbs.

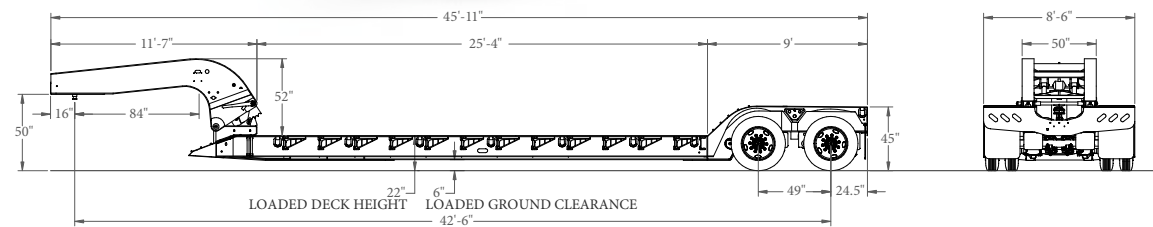


LB55-22DPS

Base Weight 24,500 lbs.

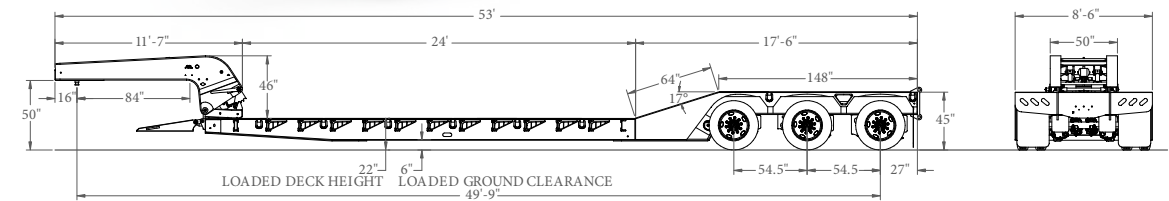


LB51-22DPS

Base Weight 23,300 lbs.

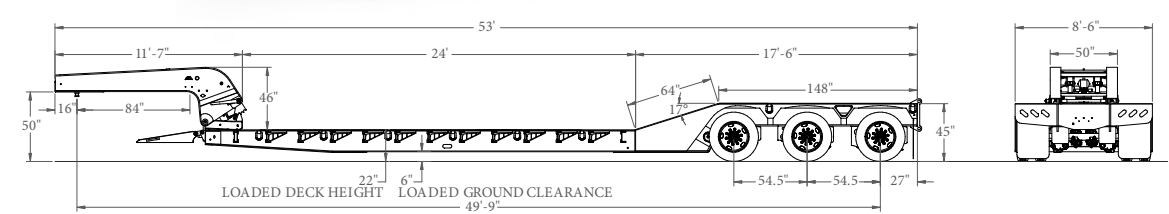


LB35-22DPS


Base Weight 18,300 lbs.

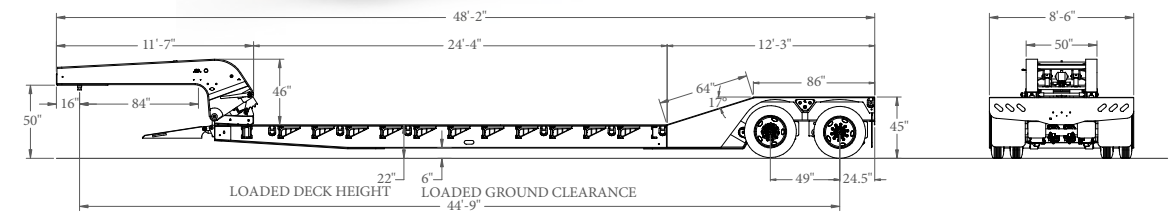

STANDARD FEATURES



Apitong Flooring



Interchangeable 6' Spring Ramp



Full with Upper Deck




Fully Fabricated 4 I-Beam Design



Tool Box


POPULAR PERFORMANCE OPTIONS



Air Ride Suspension




Interchangeable Hydraulic Ramps



Outriggers



Electric and Hydraulic Winches



Motor Grader Ramp



90° Neck with Full Top Deck



LB35-33CS

Fixed Neck Trailers (Weights in pounds / Dimensions in inches)

Standard Features	Capacity	Swing Clearance	Loaded Deck Height	OAL Length	Deck Length	Axle Spacing	Upper Deck Full Width	Upper Deck Motor Grader	Spring Suspension (Optional Air Ride)	4 beam Design w/ 20" centers Cross member	Apitong Decking	Landing Gear 2 Speed	Spring Assist 72"x24" Self-Cleaning Ramps	Optional 96"x36" Hydraulic Ramps	Tire Size	Heavy Duty Axles	Weight (lbs.)	Standard Features
LB35-26	70,000 Lbs.	84"	26"	46'	20'	49"	NA	Standard	Standard	Standard	1-1/2"	Standard	Standard	Optional	255/70R22.5	2	14,900	LB35-26
LB35-33CS	70,000 Lbs.	84"	33"	45'	26'	49"	Standard	NA	Standard	Standard	1-1/2"	Standard	Standard	Optional	235/75R17.5	2	14,300	LB35-33CS
LB35-38CS	70,000 Lbs.	84"	38"	45'	26'	49"	Standard	NA	Standard	Standard	1-1/2"	Standard	Standard	Optional	255/70R22.5	2	14,500	LB35-38CS
LB25-33CS	50,000 Lbs.	84"	33"	43'	25'	49"	NA	Standard	Spring Only	Standard	1-1/4"	Standard	Standard	NA	235/75R17.5	2	10,200	LB25-33
LB51-26	102,000 Lbs.	84"	26"	51'	20'	49"	NA	Standard	Standard	Standard	1-1/2"	Standard	Standard	Optional	255/70R22.5	3	14,850	LB51-26
LB51-33CS	102,000 Lbs.	84"	33"	49'	30'	49"	Standard	NA	Standard	Standard	1-1/2"	Standard	Standard	Optional	235/75R17.5	3	17,250	LB51-33CS
LB51-38CS	102,000 Lbs.	84"	38"	49'	30'	49"	NA	Standard	Standard	Standard	1-1/2"	Standard	Standard	Optional	255/70R22.5	3	17,250	LB51-38CS
LB25-33WT	50,000 Lbs.	84"	33"	43'	29'	49"	Standard	NA	Spring Only	Standard	1-1/4"	Standard	NA	NA	235/75R17.6	2	10,200	LB25-33WT

STANDARD FEATURES



One Piece Main Frame



Apitong Flooring



Multi-Height Position Pintle Eye



Single Drop Two Speed Landing Gear



Layover Rear Ramps



Interchangeable 6' Spring Ramp



Interchangeable Hydraulic Ramps



Double Brake Dove Tail



Locking Tool Box



Two Speed Dual Landing Gear
Standard on TA20, TA25, TA30

POPULAR PERFORMANCE OPTIONS




Tag Trailers (Weights in pounds / Dimensions in inches)

Standard Features	Payload Capacity	OAL	Structural Steel Main Frame	Tongue Length - Continuous Frame	Pintle Eye Hitch (4 Adjustable Heights)	Landing Gear Single - Drop Leg Two Speed	Landing Gear Dual - Two Speed	Loaded Deck Height	Deck Width	Deck Length (Flat + Beavertail)	Decking (Raised)	Self-Cleaning Beavertail (includes mud flaps)	Spring Assisted Ramp - 60" X 24" - Lay Flat On Dovetail - Triangle Foot	Spring Assisted Ramp 72" X 24" Self-Cleaning	Hydraulic 96" X 36" Ramps	Suspension	Brakes	Axles	Tires	Weight (lbs.)	Standard Features
TA30	60,000 lbs.	35'	Standard	6'	Standard	Optional	Standard	33"	102"	29' (24' + 5')	1-1/2"	Standard	Optional	Optional	Optional	HD Spring	Air	(3) 22,500 lbs.	215/75R17.5	11,500	TA30
TA25	50,000 lbs.	35'	Standard	6'	Standard	Optional	Standard	33"	102"	29' (24' + 5')	1-1/2"	Standard	Optional	Optional	Optional	HD Spring	Air	(3) 22,500 lbs.	215/75R17.5	10,850	TA25
TA20	40,000 lbs.	32'	Standard	6'	Standard	Optional	Standard	33"	102"	26' (21' + 5')	1-1/2"	Standard	Optional	Optional	Optional	HD Spring	Air	(2) 22,500 lbs.	235/75R17.5	7,600	TA20
TA15	30,000 lbs.	32'	Standard	6'	Standard	Standard	Optional	33"	102"	26' (21' + 5')	1-1/2"	Standard	Optional	Optional	Optional	HD Spring	Electric	(2) 15,000 lbs.	235/75R17.5	7,400	TA15
TA12	24,000 lbs.	29'	Standard	5'	Standard	Standard	Optional	33"	102"	24' (19' + 5')	1-1/2"	Standard	Standard	Optional	NA	HD Spring	Electric	(2) 12,000 lbs.	235/80R16	6,250	TA12
TA10	20,000 lbs.	29'	Standard	5'	Standard	Standard	Optional	33"	102"	24' (19' + 5')	1-1/2"	Standard	Standard	Optional	NA	HD Spring	Electric	(2) 10,000 lbs.	235/80R16	5,900	TA10


TA30

Base Weight 11,500 lbs.

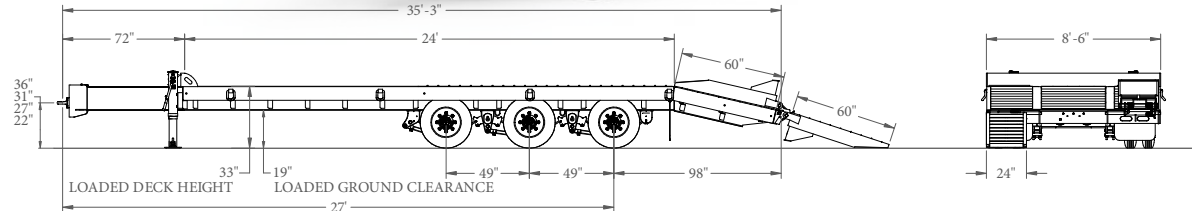


TA25

Base Weight 10,850 lbs.

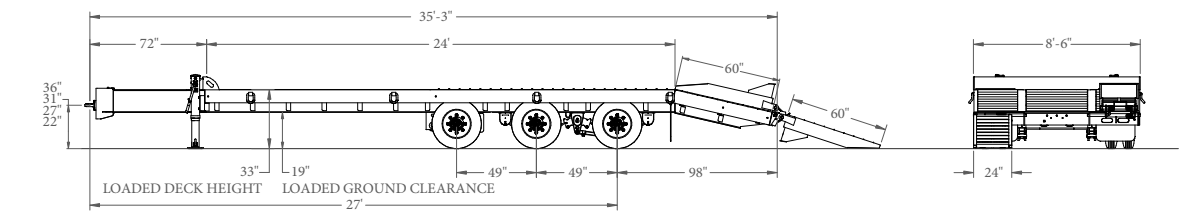


TA20

Base Weight 7,600 lbs.

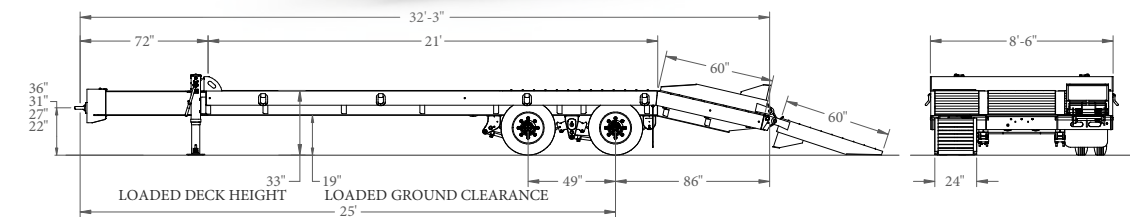


TA15

Base Weight 7,400 lbs.

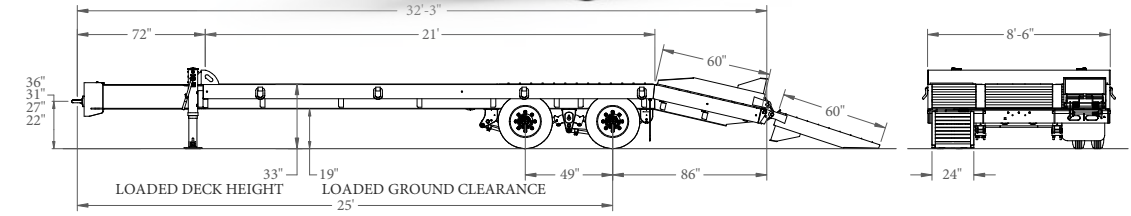


TA12

Base Weight 6,250 lbs.

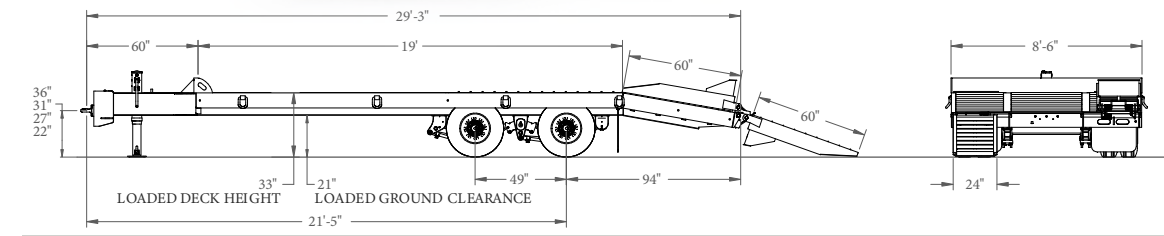

TA10

Base Weight 5,900 lbs.

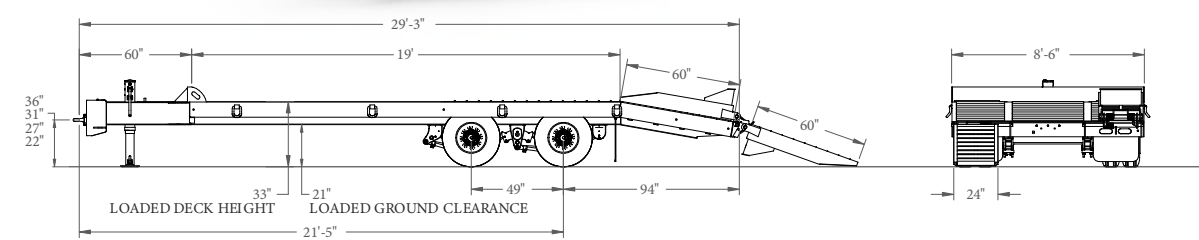



HEAVY HAUL



**FAMILY-OWNED
FOR 50 YEARS**



3D DESIGN



**STATE-OF-THE-ART
FACILITIES**



**SKILLED
CRAFTSMEN**

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment. Axle placement and legal load ratings are dependent upon federal, state, and local regulations, GVWR and tire ratings. Copyright © 2026 Pitts Enterprises, Inc. (published). All rights reserved.



EMPLOYEE OWNED
PITSTRAILERS.COM
800.321.8073 • PITTSVIEW, AL



SCAN TO
FIND YOUR
LOCAL DEALER

